




1) Go to the web component Phone --> Preference --> Homepage and enable the broadcast icon

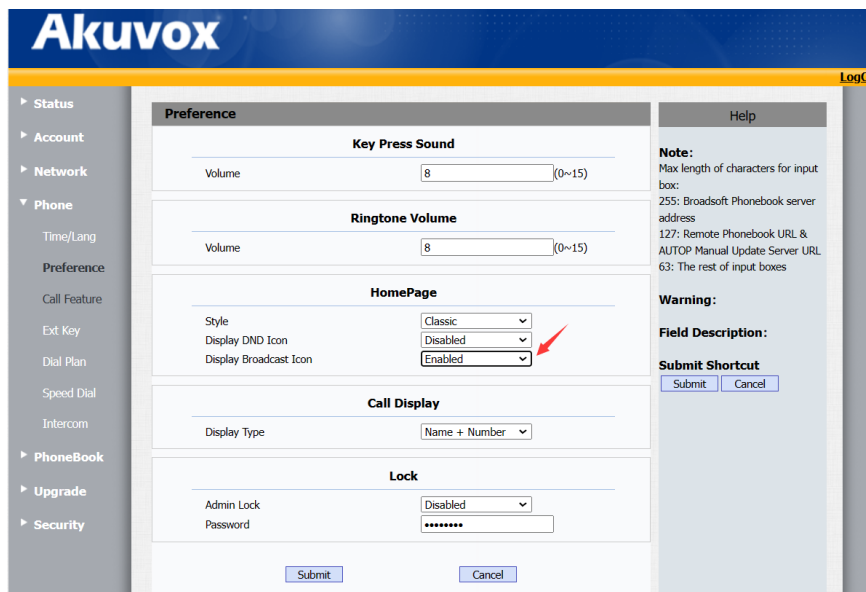

2) In Phone -->Ext Key choose Type as Multicast paging and configure the label and the multicast address. The IP must be between 224.0.1.0 and 224.0.1.255 and the ports around the 20000

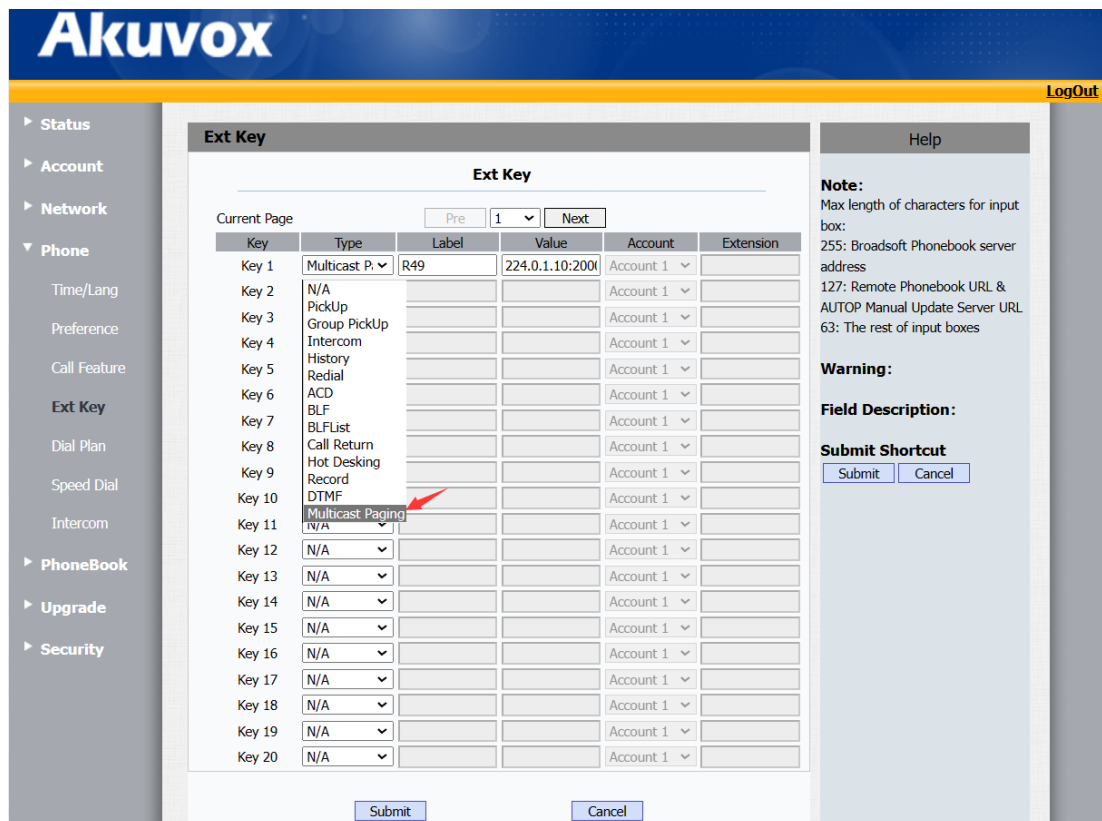

3) Go to the indoor monitors' web component and configure the same listening address. In Phone --> Multicast configure the Listen list as in the picture below. Please note that the listening address should be exactly the same as the multicast address in R49G

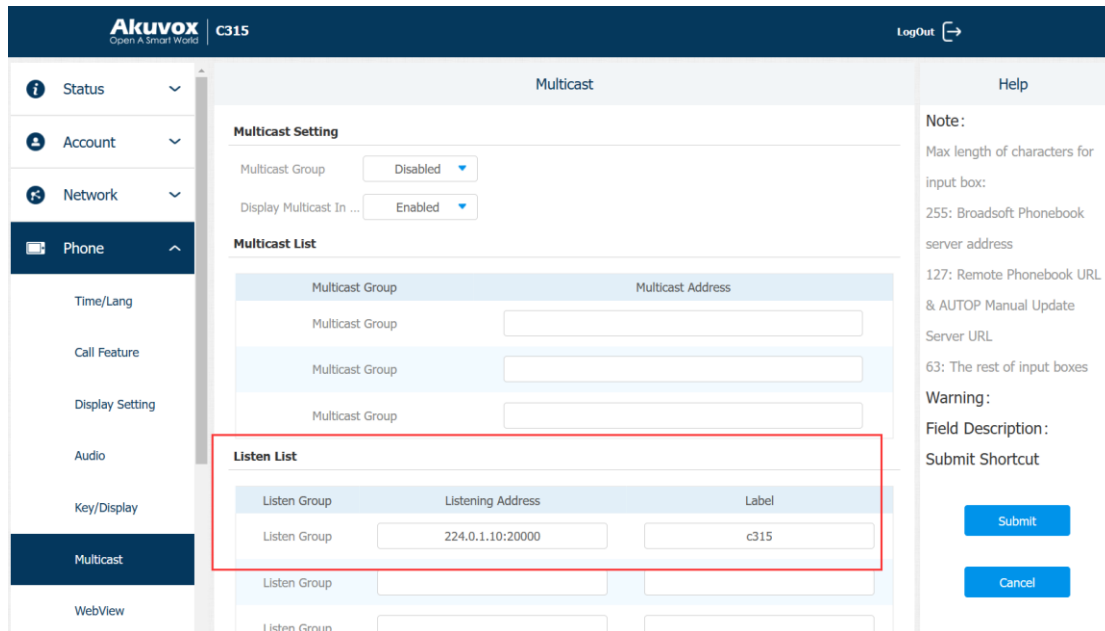

4) You can start the multicasting by clicking the speaker icon marked in the picture below on the homepage of R49

